

■ Features

- Three-Phase 320 ~ 600Vac wide range input, 600 ~ 700Vac surge input for 1 sec. occasionally (Dual phase operation possible)
- Global certificates in multi-fields(ITE 62368-1,Industrial 61558-1/-2-16,61010) & Marine DNV,SEMI47,C1D2 HazLoc approved
- 48mm Ultra slim width
- High efficiency up to 93.5% and no load power dissipation<2.5W
- 150% Peak Power capability
- Built-in constant current limiting circuit
- Current sharing up to 960W(3+1) for parallel use (By request)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+85°C wide range operation temperature (>+60°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Ultra low inrush current < 10A
- Built-in ORing FET (By request)
- Tool free terminal block (LA type)
- Conformal coating
- Can be installed on DIN Rail TS-35/7.5 or 15
- 5 years warranty

■ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus


■ GTIN CODE




MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

The XTR-240 series is a 240W AC/DC 3Ø 320~600Vac input ultra slim industrial high-reliability DIN rail power. Key features of this series include a narrow 48 mm casing, optimizing system installation space, it boasts a maximum efficiency of 93.5% and a low standby power consumption <2.5W for energy savings and carbon reduction. It provides constant current with up to 150% peak power; fanless design , ultra-wide operating temperature range of -40 to +85°C (up to +60°C at full load); OVCIII compliance; parallel function capability up to 960W(By request);ultra-low inrush current of <10A; built-in DC OK and ORing FET(optional) ; internal PCB coating offers basic moisture and dust protection, and it has multiple terminal blocks for selection.With comprehensive protection functions, complete safety certifications, and a 5-years warranty, the XTR-240 series is a compact, high-performance, and highly reliable DIN rail power supply.

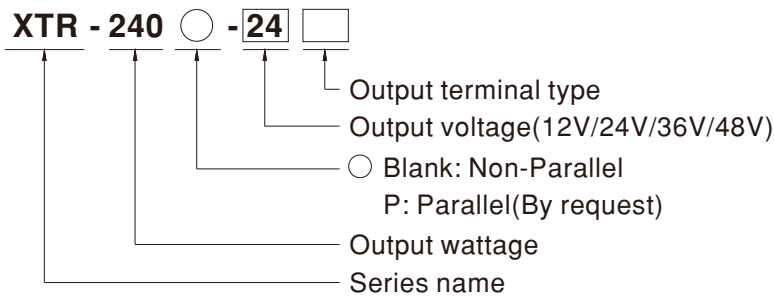■ Model Encoding



Terminal Type Options		Note
Blank	Screw Terminal 	In stock
LA	Lever-Actuated 	In stock
PI	Push In 	In stock




240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power

XTR-240 series



SPECIFICATION

MODEL		XTR-240○-12□		XTR-240○-24□		XTR-240○-36□		XTR-240○-48□		
		○=Blank, P    □=Blank, LA, PI								
OUTPUT	DC VOLTAGE	12V		24V		36V		48V		
	RATED CURRENT	15A		10A		6.66A		5A		
	CURRENT RANGE	0 ~ 15A		0 ~ 10A		0 ~ 6.66A		0 ~ 5A		
	RATED POWER	180W		240W		239.8W		240W		
	PEAK	CURRENT(5 sec.)	22.5A		15A		10A		7.5A	
		POWER(5 sec.)	270W		360W		360W		360W	
	RIPPLE & NOISE (max.)	Note.2	100mVp-p		100mVp-p		120mVp-p		120mVp-p	
	VOLTAGE ADJ. RANGE		12 ~ 15V		24 ~ 29V		36 ~ 42V		48 ~ 55V	
	VOLTAGE TOLERANCE	Note.3	± 1.0%		± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION		± 0.5%		± 0.5%		± 0.5%		± 0.5%	
	LOAD REGULATION		± 1.0%		± 1.0%		± 1.0%		± 1.0%	
SETUP, RISE TIME		2000ms, 60ms/400Vac		1500ms, 60ms/500Vac at full load						
HOLD UP TIME (Typ.)		20ms / 400Vac		40ms / 500Vac at full load						
INPUT	VOLTAGE RANGE	Note.4	Three-Phase 320 ~ 600Vac (Dual phase operation possible in connecting L1,L3,FG or L2,L3,FG ) 450 ~ 800Vdc							
	NO LOAD POWER CONSUMPTION (Typ.)		2.5W/400Vac		2.5W/400Vac		2.5W/400Vac		2.5W/400Vac	
	FREQUENCY RANGE		47 ~ 63Hz							
	POWER FACTOR (Typ.)		PF≥0.53/400Vac    PF≥0.52/500Vac at full load							
	EFFICIENCY (Typ.)		88.7%		92.5%		92.5%		93.5%	
	AC CURRENT (Typ.)		0.69A/400Vac		0.6A/500Vac					
	INRUSH CURRENT (Typ.)		COLD START 10A/400Vac							
	LEAKAGE CURRENT		<2mA / 530Vac							
PROTECTION	OVERLOAD		105%~150% rated output power for more than 5 sec then constant current limiting without shutdown at rate current when Vo=30%~100% Hiccup mode when Vo<30% rated voltage							
	OVER VOLTAGE		15 ~ 18V		30 ~ 36V		45 ~ 54V		56 ~ 65V	
			Hiccup mode , recovers automatically after fault condition is removed							
	OVER TEMPERATURE		Shut down o/p voltage or hiccup mode, recovers automatically after temperature goes down							
FUNCTION	PARALLEL (optional)		Up to 960W (3+1), please refer to Function Manual for more details							
	DC OK RELAY CONTACT		Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load							
ENVIRONMENT	WORKING TEMP.	Note.5	-40 ~ +85℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY		20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 60℃ )							
	VIBRATION		Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6							
SAFETY & EMC (Note 7)	SAFETY STANDARDS		UL121201/CSA C22.2 NO.213.17 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4; UL61010; TUV BS EN/EN62368-1, BS EN/EN61558-1/-2-16,BS EN/EN61010;CB IEC62368-1,IEC61558-1,IEC61010;RCM AS/NZS 62368-1,AS/NZS 61558-1/-2-16; BSMI CNS15598-1;CCC GB4943.1;EAC TPTC004 approved; KC KC62368-1 and BIS IS13252 (Part 1):2010 certified, no stock ,contact sale for inquires							
	OVER VOLTAGE CATEGORY	Note.6	IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m ) IEC/EN/UL 61010 (OVC II, altitude up to 5000m ) IEC/EN 62368-1 (OVC II, altitude up to 5000m )							
	SAFETY EXTRA-LOW VOLTAGE(SELV)		IEC/EN 61558-2-16 (SELV 12V/24V) IEC/EN/UL 61010-2-201 (SELV 12V/24V) IEC/EN 62368-1 (SELV/ ES1 12V/24V )							
	WITHSTAND VOLTAGE		I/P-O/P:4.87KVac    I/P-FG:2.5KVac    O/P-FG:0.5KVac    O/P-DC OK:0.5KVac							
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH							
	EMC EMISSION	Parameter		Standard				Test Level / Note		
		Conducted		BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936				Class B		
		Radiated		BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936				Class B		
		Harmonic Current		BS EN/EN61000-3-2				Class A		
		Voltage Flicker		BS EN/EN61000-3-3				-----		
	EMC IMMUNITY	BS EN/EN55035 , BS EN/EN61204-3								
		Parameter		Standard				Test Level / Note		
		ESD		BS EN/EN61000-4-2				Level 4, 15KV air ; Level 4, 8KV contact		
		Radiated Field		BS EN/EN61000-4-3				Level 3, 10V/m ; criteria A		
		EFT / Burst		BS EN/EN61000-4-4				Level 4, 4KV ; criteria A		
		Surge		BS EN/EN61000-4-5				Level 4, 2KV / Line-Line, Level 4, 4KV/ Line-Earth		
		Conducted		BS EN/EN61000-4-6				Level 3, 10V/m ; criteria A		
Magnetic Field			BS EN/EN61000-4-8				Level 4, 30A/m ; criteria A			
Voltage Dips and Interruptions			BS EN/EN61000-4-11				>95% dip 0.5 periods, 30% dip 25 periods> 95% interruptions 250 periods			
OTHERS	MTBF		K hrs min.    Telcordia SR-332(Bellcore) ; K hrs min.    MIL-HDBK-217F (25℃)							
	DIMENSION		48*125.2*125mm (W*H*D)							
	PACKING		0.8Kg ; 12pcs/12.5Kg/0.89CUFT							
NOTE	1. All parameters NOT specially mentioned are measured at 400Vac input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Dual phase operation is allowed under certain derating to output load. Please refer to derating curves for details. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> ) ※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>									

## ■ Block Diagram

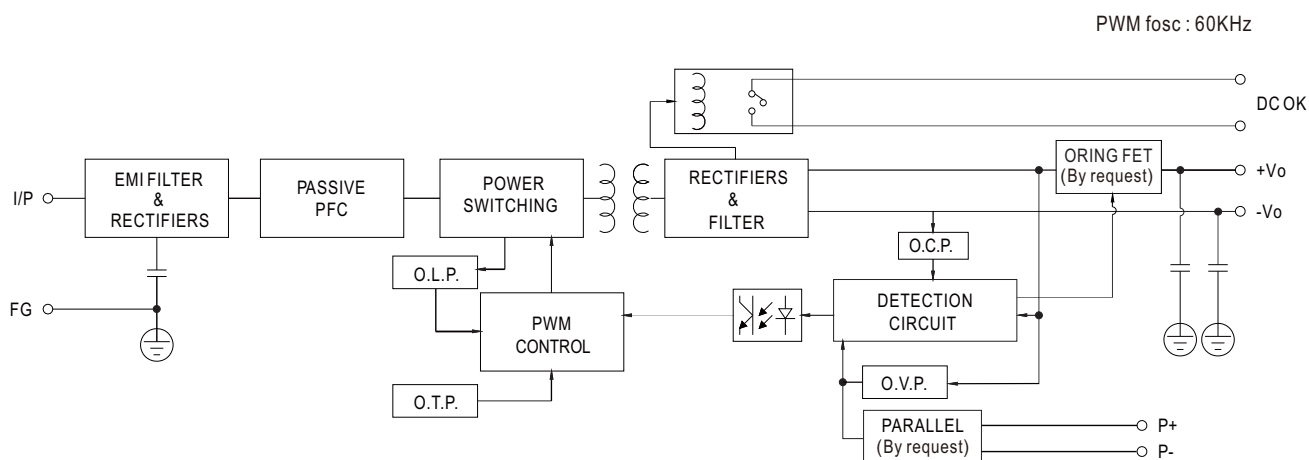


## ■ Derating Curve

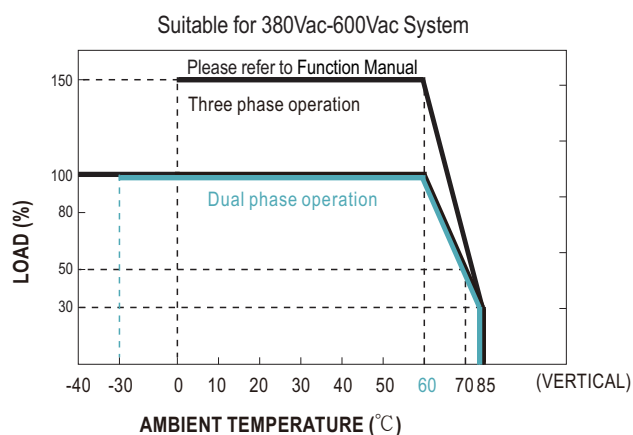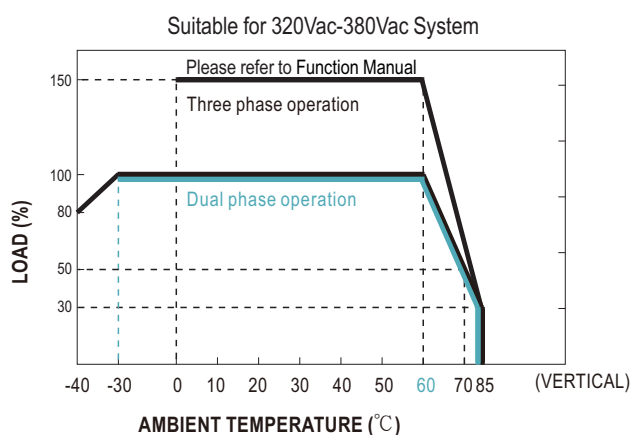

Note : Dual phase operating temperature is between -30°C~+85°C.

## ■ Output derating VS input voltage

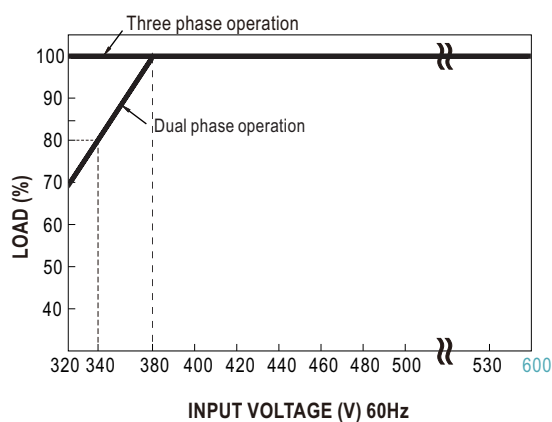

Note : When ambient temperature is between -30°C~-10°C and unit is operated in dual-phase input mode :

- At dual-phase input 340~380Vac, power supply can be loaded but might experience hiccup at cold start for 5~10 seconds.
- At dual-phase input 320~340Vac, power supply can only be start up at no load condition, after voltage stabilized it can then be loaded.

## ■ Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

$P_{av}$  : Average output power (W)


$P_{pk}$  : Peak output power (W)

$P_{npk}$  : Non-peak output power (W)


$P_{rated}$  : Rated output power (W)

$t$  : Peak power width (sec)

$T$  : Period (sec)

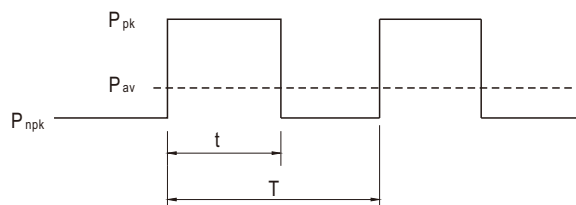

— 3Ø 320 ~ 600Vac

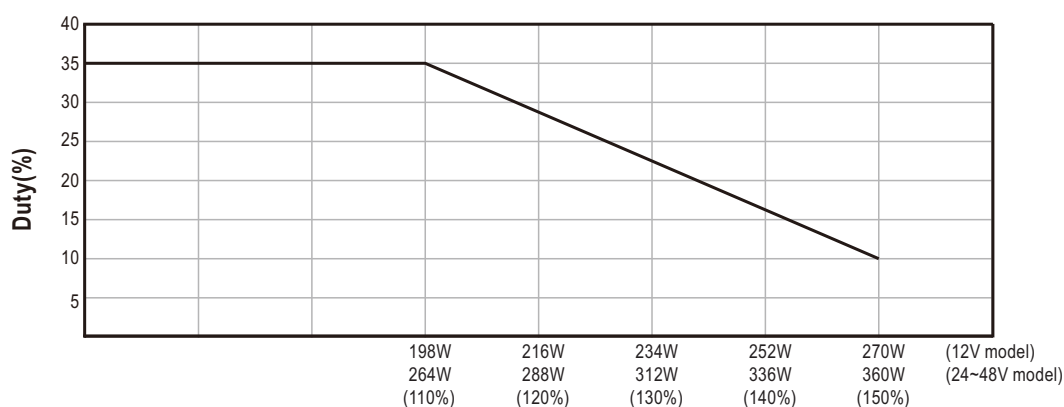

Peak output power (W)

**For example (24V model) :**

$V_{in} = 400V$      $\text{Duty}_{max} = 10\%$

$P_{av} = P_{rated} = 240W$

$P_{pk} = 360W$

$t \leq 5 \text{ sec}$

$T \geq \frac{5 \text{ sec}}{10\%} \geq 50 \text{ sec}$

$$P_{npk} \leq \frac{T P_{av} - t P_{pk}}{T-t}$$



$P_{npk} \leq 226W$



240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

■ Function Manual

Pin No.	Function	Description
1,2	DC OK	Contact close : PSU turns ON/DC_OK ; Contact open : PSU turns OFF/DC_fail; Contact ratings (max.): 30Vdc/1A,30Vac/0.5A resistive load.
3	P+ (By request)	Current sharing signal. When units are connected in parallel, the P+ pins of the units should be connected mutually to allow current balance between units.
4	P- (By request)	Current sharing signal. When units are connected in parallel, the P- pins of the units should be connected mutually to allow current balance between units. P- Signal is internally connected to -Vo.

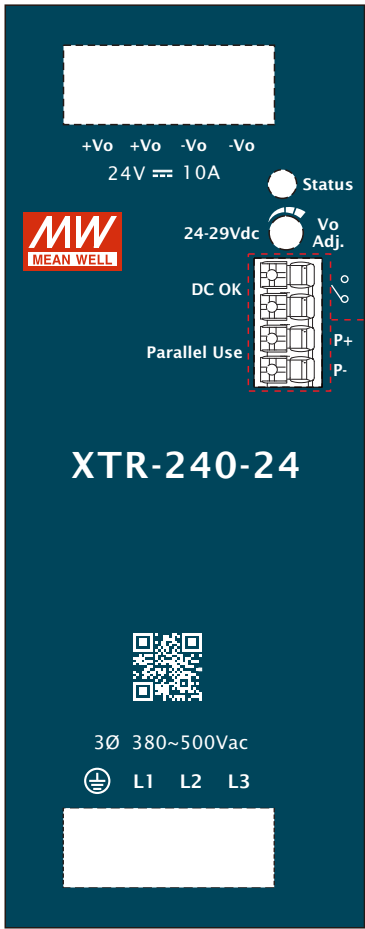


## 1.Parallel Use (By request)

XTR-240 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 0.2V.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (6) When in parallel operation, the minimum output load should be greater than 5% of total output load. (Min. load >5% rated current per unit x number of unit)
- (7) In parallel connection, maybe only one unit (master) operate if the total output load is less than 5% of rated load condition.

The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.



- (8) P+ and P- lines should be twisted in pairs

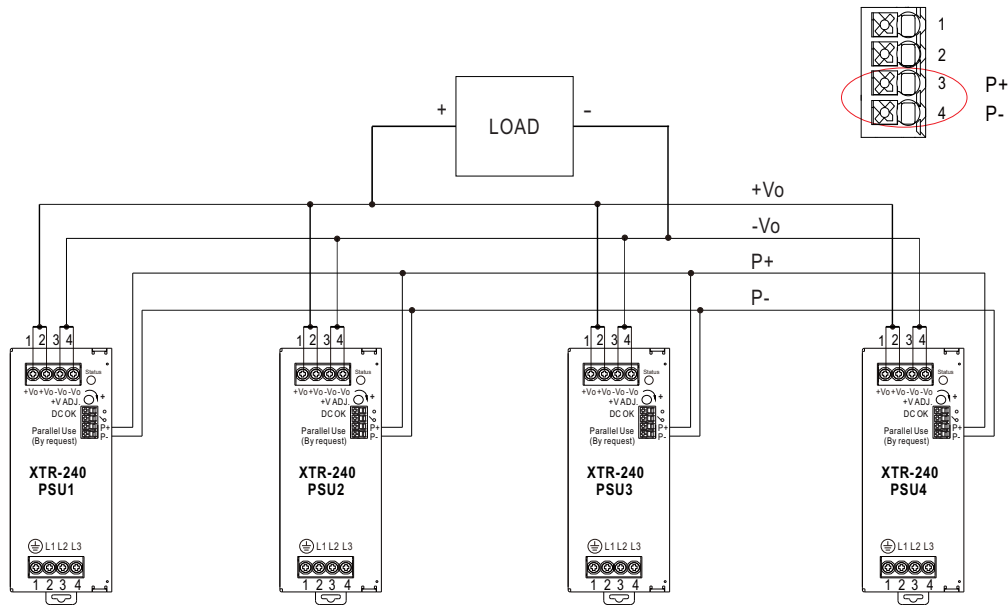

※ Please contact MEAN WELL for more details.

## 2.DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact ratings (max.)	30Vdc/1A ,30Vac/0.5A resistive load.

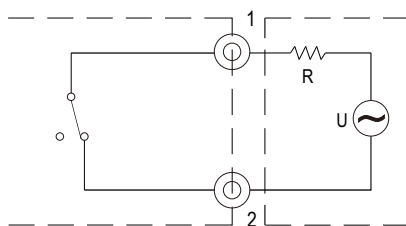


External voltage source (U) and resistor (R)  
(The max. Sink is 30Vdc/1A, 30Vac/0.5A)

Internal circuit of DC\_OK, via relay contact

### 3. Protection Against Inverse Reverse From The Load (By request)

Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load.

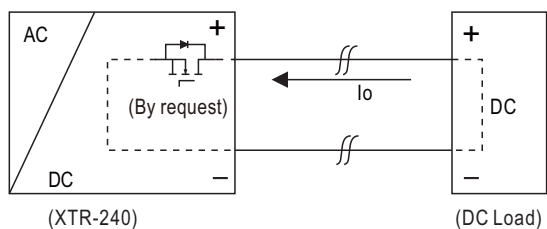


PSU'S ORing FET turn OFF voltage	
MODEL	Max. allowable reverse voltage
XTR-240-12	<16V
XTR-240-24	<35V
XTR-240-36	<50V
XTR-240-48	<63V

## Mechanical Specification

(Unit:mm , Tolerance  $\pm 1\text{mm}$ )

Case No. 303

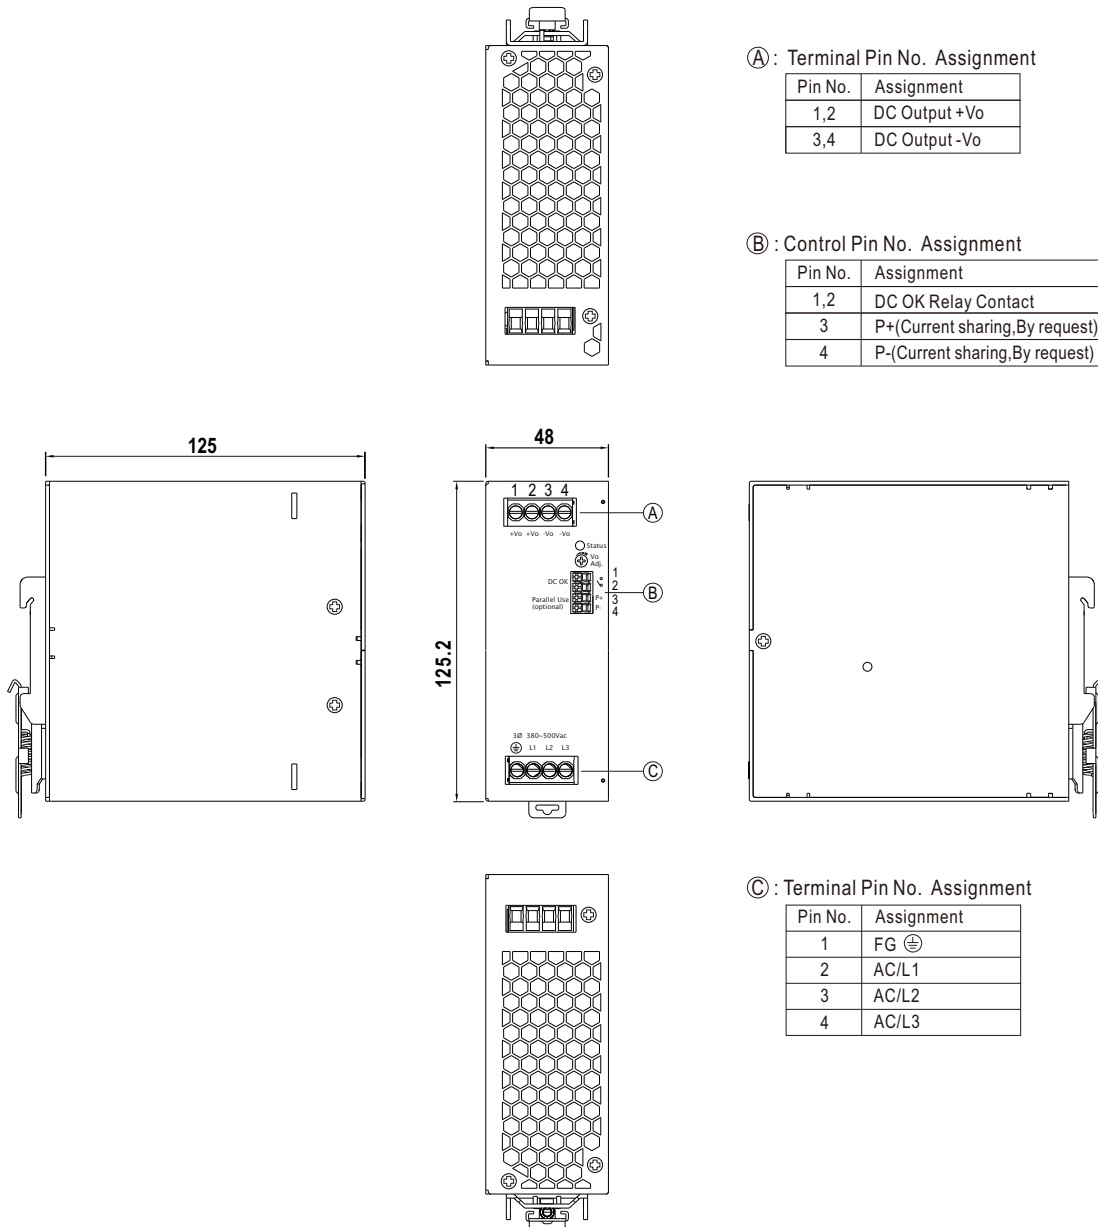

## Recommend Wiring


	AC Input T.B	DC Output T.B	Signal connector
Solid Wire	4mm <sup>2</sup> max.	4mm <sup>2</sup> max.	1.5mm <sup>2</sup> max.
A.W.G	28~10 AWG	28~10 AWG	24~16 AWG
Screw Terminal Torque	4 Lb-In	4 Lb-In	/





## 240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

### ■ Installation Instruction

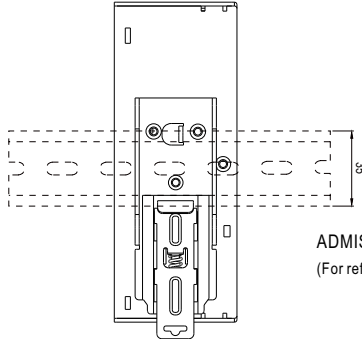

This series fits DIN rail TS35/7.5 or TS35/15.

For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>