


UNIT:MM

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/1	20-02-27	B0225C01	Changing Drawing

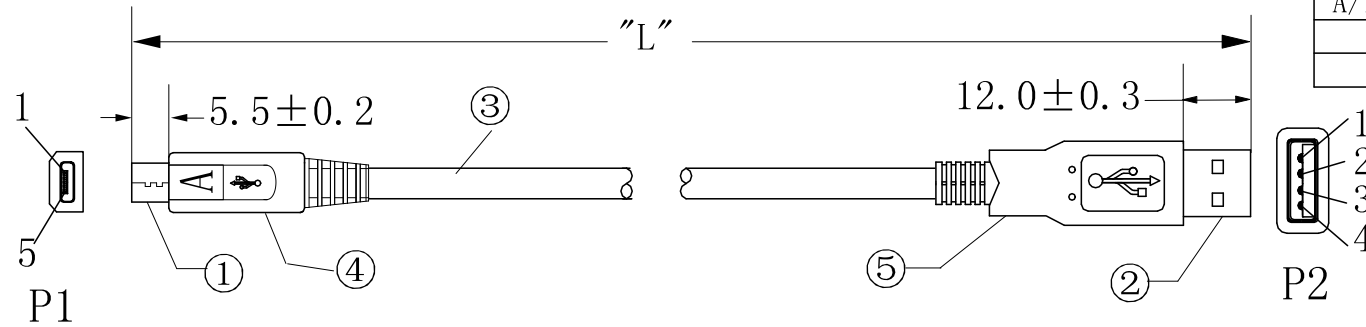


PIN ASSIGNMENT:

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4+5	BLACK	4
SHELL DRAIN+BRAID		SHELL

CABLE WHITE PRINT
 E166160 AWM 2725 80°C 30V
 28AWGX1P+28AWGX2C USB2.0

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 0hm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

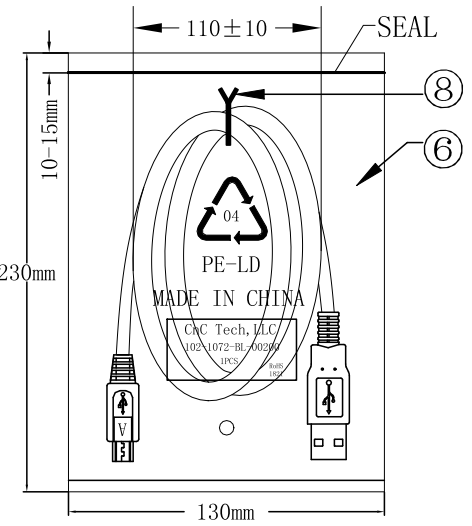

1PCS/PE BAG

PART NO	WIRE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
102-1072-BL-00100	1000 ± 30		BLACK	985-990MM

NO.	NAME	QTY	SPECIFICATION
⑧	TIE	1	BLACK L=120mm
⑦	PE BAG	1/10	CLEAR SIZE:280X330X0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE:130X230X0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	OUT JACKET	6g	BLACK PVC-55P (MOULD NO:2002-527)
④	OUT JACKET	6g	BLACK PVC-55P (MOULD NO:WM-173)
③	CABLE	1	USB2.0 UL2725 [28AWGX1P+28AWGX2C]+AEB JACKET:BLACK OD:3.8mm (671-线规-E-1)
②	CONN	1set	USB A MALE SHELL:NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P A/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

CnC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2020/02/27	DESCRIPTION: 4C CABLE USB A/M+MICRO USB
CHECKED BY:	SHEET 1 of 1	ITEM NO. As above
APPROVED BY:	SCALE 1:1	REV. A/1 UNIT: mm