



Light weight standard polyester braided sleeving


• Helagaine HEGPL

Features and Benefits

Helagaine HEGPL is very light, flexible and resistant to abrasion. HEGPL provides very good protection against the mechanical and chemical influences typically found in automobiles. Due to its high expansion rate of more than 3:1, HEGPL can be easily applied to hose assemblies and cable harnesses with very irregular diameters.

Application

Helagaine HEGPL is used primarily in automobile interiors, motor compartments, car bodies and underfloors.

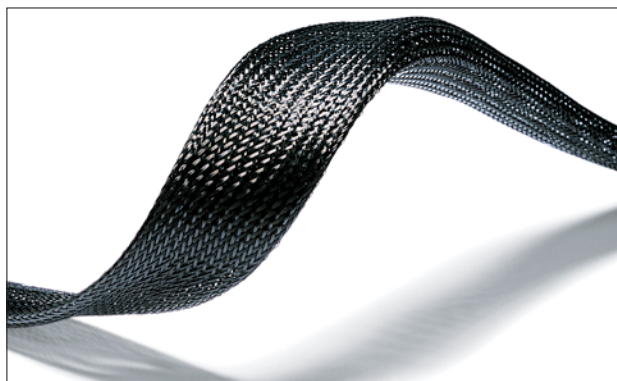

Helagaine HEGPL Braided Sleeving.



To prevent fraying, the sleeve can be cut with the hot cutting tool HSG0, see page 424.

Material Data

Material	Polyester (PET)
Colour	Black (BK)
Operating Temperature	-50 °C to +150 °C, Intermittent +220 °C
Melting Point	+250 °C
Flammability	UL94 V2, FMVSS 302 Type B



Technical Table

Article-No.	Type	Bundle Ø min.	Bundle Ø max.	Reel Length (m)
170-80503	HEGPL03	3	8	1000
170-80506	HEGPL06	5	12	400
170-80512	HEGPL12	8	21	300
170-80520	HEGPL20	12	30	300
170-80530	HEGPL30	18	55	200
170-80540	HEGPL40	24	66	150
170-80550	HEGPL50	30	82	150

All dimensions in mm. Subject to technical changes.

Colour grey available on request.

Cuts in any lengths.