

Data Sheet for Article: MAISO24RA-

LED signal tower compact with buzzer, tube base, 24VDC

IP66, Version Steady light or flashing light on red, Steady light on yellow, Steady light on green, Make-up Pre-assembled signal tower, Control Multipole cable, Voltage range DC 24V, Volume 75dB




Technical Data

Series	MA 24V
Version	Steady light or flashing light on red Steady light on yellow Steady light on green
Color of LED	Red Yellow Green
Voltage range (V)	DC 24
Make-up	Pre-assembled signal tower
Control	Multipole cable
IP Rating	IP66
Diameter (mm)	61
Inlets	Bottom entry
Light source	LED

Technical Data - continued

Terminal type	Cage clamp
Lens	Polycarbonate, ribbed inside
mounting	vertical
Service life	100000
Temperature range - Operation (°C)	-25 to +50
Impact Resistance	IK07
Connections	2.5mm ² /14AWG
Volume (dB)	75
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate White

Dimensioned drawing: LED signal tower compact with buzzer, tube base, 24VDC

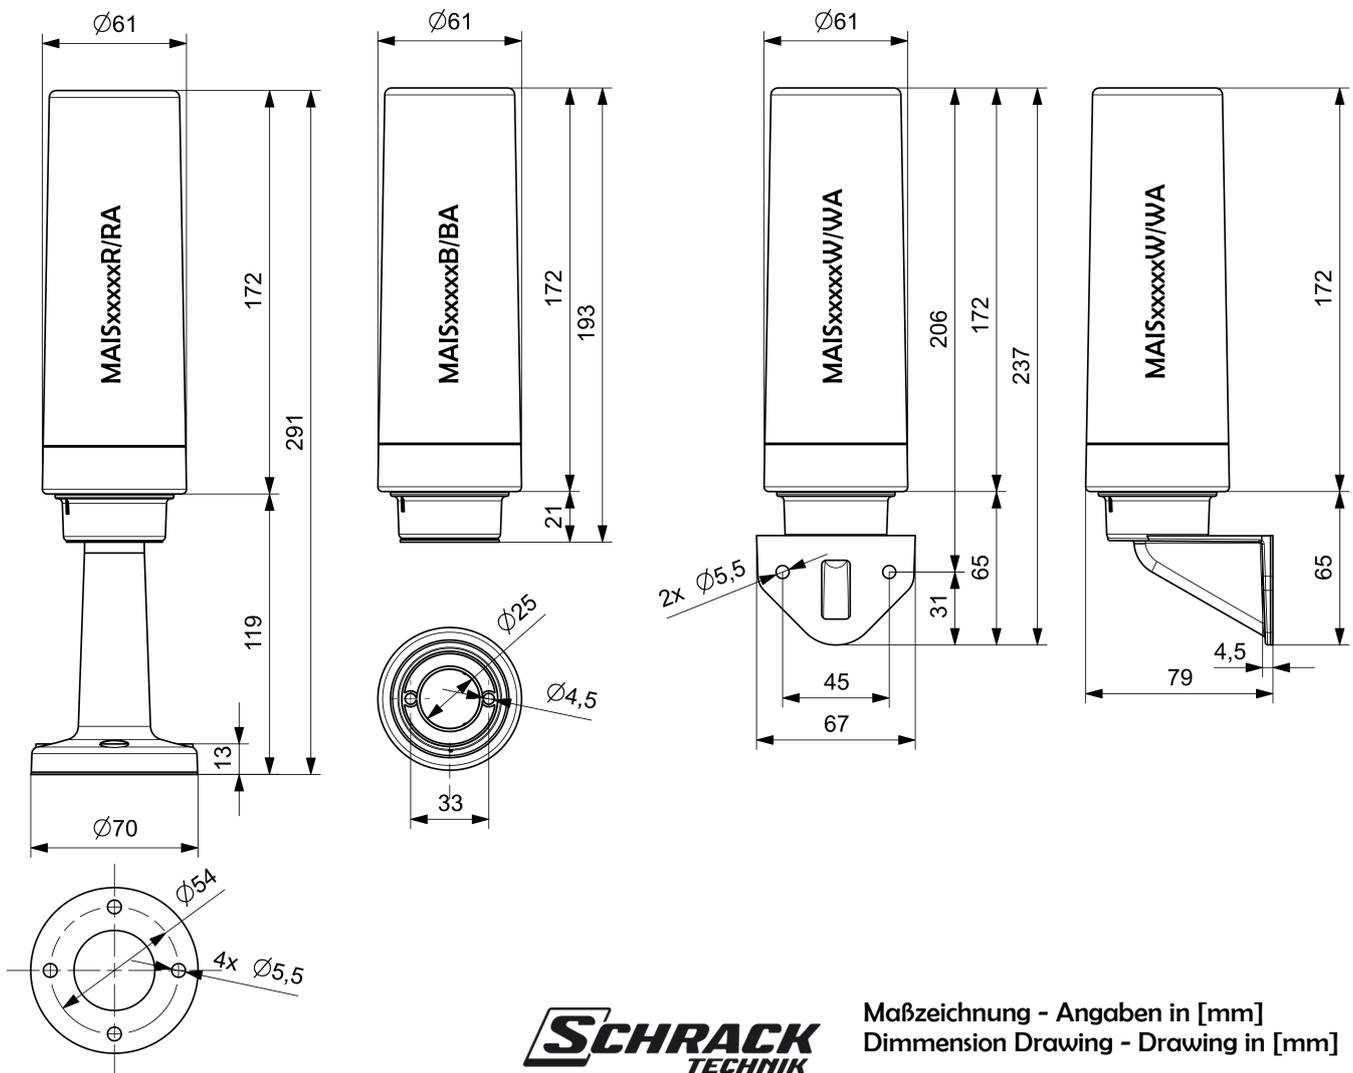

SCHRACK
TECHNIK

Maßzeichnung - Angaben in [mm]
Dimension Drawing - Drawing in [mm]

DESCRIPTION	Order No.
LED signal tower compact with buzzer, tube base, 24VDC IP66, Version Steady light or flashing light on red, Steady light on yellow, Steady light on green, Make-up Pre-assembled signal tower, Control Multipole cable, Voltage range DC 24V, Volume 75dB	MAIS024RA