

Features


- These high performance cable glands made from brass are a reliable way to clamp fix protect cables from water and dust as they are a way of sealing and terminating housing
- They offer protection for electrical equipment and enclosures and are widely used in mechanical equipment, machinery, lights etc.



Specification

IP Rating	IP68
With Strain Relief	Yes
Model	Straight
Material	Brass
Glass-Fibre Reinforced	No
Shock Resistant	Yes
Bend Radius Protection / Trumpet Flare	No
With Locknut	Yes
Snapping in Opening	No
Flat Cable Coupling	No
Explosion-Tested Version	No
For Armoured Cable	No
EMC-Version	No
Screened	No
Type of Sealing	Sealing Ring
For Ex-Zone Gas	None
For Ex-Zone Dust	None
Halogen Free	Yes
Operating Temperature	-40 ... 100 °C

Dimensions

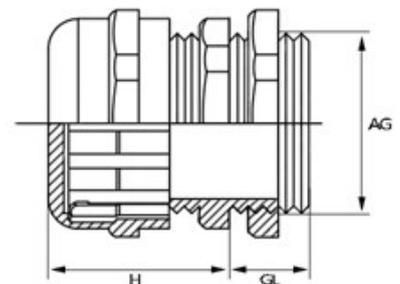

RND Type	AG	GL	H	Thread Size	Pitch Thread	Thread Length	Wrench Width	Cable Ø
RND 465-01297	18.6 mm	6 mm	22 mm	PG11	1.588 mm	6 mm	20 mm	5 ... 10 mm
RND 465-01298	12.5 mm	5 mm	19 mm	PG7	1.588 mm	5 mm	14 mm	3 ... 6.5 mm
RND 465-01299	15.2 mm	6 mm	21 mm	PG9	1.588 mm	6 mm	17 mm	4 ... 8 mm
RND 465-01300	20 mm	6 mm	23 mm	M20	1.5 mm	6 mm	22 mm	6 ... 12 mm
RND 465-01301	12 mm	6.5 mm	19 mm	M12	1.5 mm	6.5 mm	14 mm	3 ... 6.5 mm
RND 465-01302	25 mm	7 mm	26 mm	M25	1.5 mm	7 mm	30 mm	11 ... 16 mm
RND 465-01303	16 mm	6 mm	21 mm	M16	1.5 mm	6 mm	17 mm	4 ... 8 mm