

SPECIFICATIONS

CONTACT RESISTANCE: 30mΩ max
 INSULATION RESISTANCE: DC 500V 100MΩ min
 DIELECTRIC STRENGTH: AC 1000V 1 minute
 ELECTRICAL LIFE: 5,000 cycles min
 MECHANICAL LIFE: 10,000 cycles min
 TERMINAL MATERIAL: Copper alloy,
 silver or gold plated

BUTTON COLOR CHART:



COLOR NO.	COLOR	COLOR NO.	COLOR
1	White	5	Yellow
2	Black	6	Green
3	Red (Std.)	7	Blue

*RoHS Compliant: Please add a code "H" to part number.
 For example: R18-25A-3-H

3A 125V AC





Model No.	TYPE
R18-21A	ON-OFF
R18-21B	OFF-(ON)
R18-21C	ON-(OFF)



3A 125V AC





Model No.	TYPE
R18-23A	ON-OFF
R18-23B	OFF-(ON)
R18-23C	ON-(OFF)



3A 125V AC





Model No.	TYPE
R18-24A	ON-OFF
R18-24B	OFF-(ON)



3A 125V AC





Model No.	TYPE
R18-25A	ON-OFF
R18-25B	OFF-(ON)
R18-25C	ON-(OFF)



3A 125V AC





Model No.	TYPE
R18-26A	ON-OFF
R18-26B	OFF-(ON)



1A 125V AC




Model No.	TYPE
R18-27A	OFF-(ON)
R18-27B	ON-(OFF)



1A 125V AC




Model No.	TYPE
R18-28A	OFF-(ON)

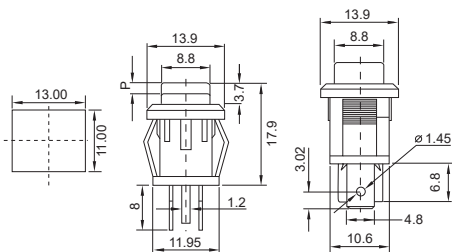

3A 125V AC




Model No.	TYPE
R18-27C	ON-OFF

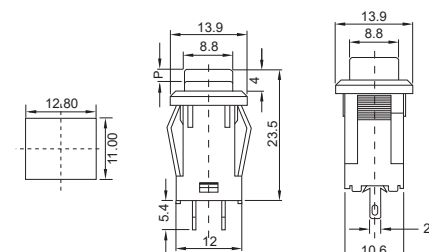

1A 125V AC



Model No.	TYPE
R18-29A	OFF-(ON)
R18-29C	ON-OFF

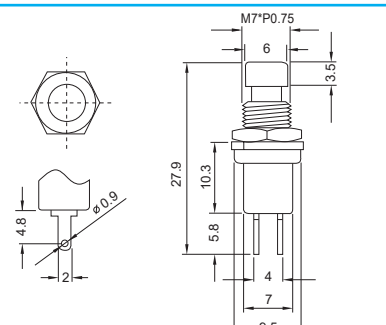

1A 125V AC



Model No.	TYPE
R18-29B	ON-(OFF)

